


ATO® FH2 SERIES

30 A Max Stackable Block In-Line Fuse Holder

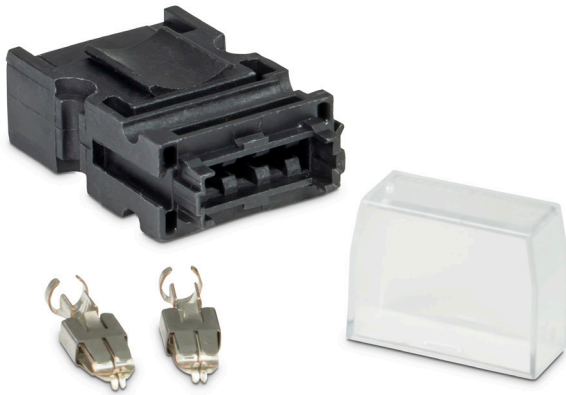

Description

Install an ATO® blade-style fuse with ease using the ATO® FH2 Stackable Block In-Line Fuse Holder. Attachable in the X- and Y-direction, this stackable fuse holder can also be used with additional ATO® FH2 fuse holders to create a fuse block for protecting multiple circuits.

The ATO® FH2 stackable fuse holder features a black, thermoplastic body with a UL 94 V-0 flammability rating for heat and flame resistance. In addition, the automotive in-line fuse holder assembly can be completed with a transparent thermoplastic cover for protection against debris.

Web Resources

Download 2D print, installation guide and technical resources at: littelfuse.com/FH2

Ordering Information

| PART NUMBER | DESCRIPTION | FUSE TYPE | MOUNTING METHOD | FLAMMABILITY RATING |
|---------------|---|-----------|---------------------|---------------------|
| 178.6115.0001 | Thermoplastic Fuse Holder Housing - 100 Pcs. | ATO | In-Line Fuse Holder | UL 94 V-0 |
| 178.6115.0002 | Thermoplastic Fuse Holder Housing - 1,000 Pcs. | ATO | In-Line Fuse Holder | UL 94 V-0 |
| 178.6116.1001 | DFK Crimp Terminal - 0.5 - 1.0 mm ² - 200 Pcs. | -- | -- | -- |
| 178.6116.1002 | DFK Crimp Terminal - 0.5 - 1.0 mm ² - 1,000 Pcs. | -- | -- | -- |
| 178.6116.1008 | DFK Crimp Terminal - 0.5 - 1.0 mm ² - 3,000 Pcs. | -- | -- | -- |
| 178.6116.2501 | DFK Crimp Terminal - 1.5 - 2.5 mm ² - 200 Pcs. | -- | -- | -- |
| 178.6116.2502 | DFK Crimp Terminal - 1.5 - 2.5 mm ² - 1,000 Pcs. | -- | -- | -- |
| 178.6116.2508 | DFK Crimp Terminal - 1.5 - 2.5 mm ² - 2,500 Pcs. | -- | -- | -- |
| 178.6116.6001 | DFK Crimp Terminal - 4.0 - 6.0 mm ² - 200 Pcs. | -- | -- | -- |
| 178.6125.0001 | Transparent Thermoplastic Fuse Holder Cover - 100 Pcs. | -- | -- | UL 94 V-0 |
| 178.6125.0002 | Transparent Thermoplastic Fuse Holder Cover - 1,000 Pcs. | -- | -- | UL 94 V-0 |

Specifications

| | |
|-----------------------------------|--|
| Continuous Current Rating: | 30A |
| Fuse Type: | ATO |
| Flammability Rating: | UL 94 V-0 Material |
| Mounting Method: | In-Line Fuse Holder |
| Input Terminals: | Wire Crimp 6.3mm Receptacles |
| Output Terminals: | Wire Crimp 6.3mm Receptacles |
| Additional Notes: | Compatible with the FKS ATO Fuse at 80V DC |

Applications

- Accessory Circuit Protection

Features and Benefits

- Compatible with ATO® blade-style fuses (sold separately)
- 30 A max continuous current rating
- Attachable in the X- and Y-direction for simple stacking or row mounting
- Heat-resistant thermoplastic fuse holder body with a UL 94 V-0 flammability rating
- Leaf spring connector system
- Wire crimp 6.3 mm receptacles
- Transparent thermoplastic cover offers protection and a clear view