

CH10x38 gG 0.5A/500V



Specifications

ETI Code	002620017
Description	CH10x38 gG 0.5A/500V
Weight	7.6
Level	Cilindrical fuse links gG
Product group	C low Voltage cylindrical fuses
Characteristics	gG
Rated AC voltage (V)	500
Rated current (A)	0,5
Type	CH
Size	CH10
Breaking capacity AC (kA)	100
Dimensions	10X38

Online product page 

Other documentation



[EU declaration](#)

[Technical data catalogue](#)




ETIM international clasification


Nominal current	0.5A
Size	10x38 mm
Rated voltage	AC 500/600 V
With striker	

Cut-off current characteristics

Cut-off current characteristics
CH10

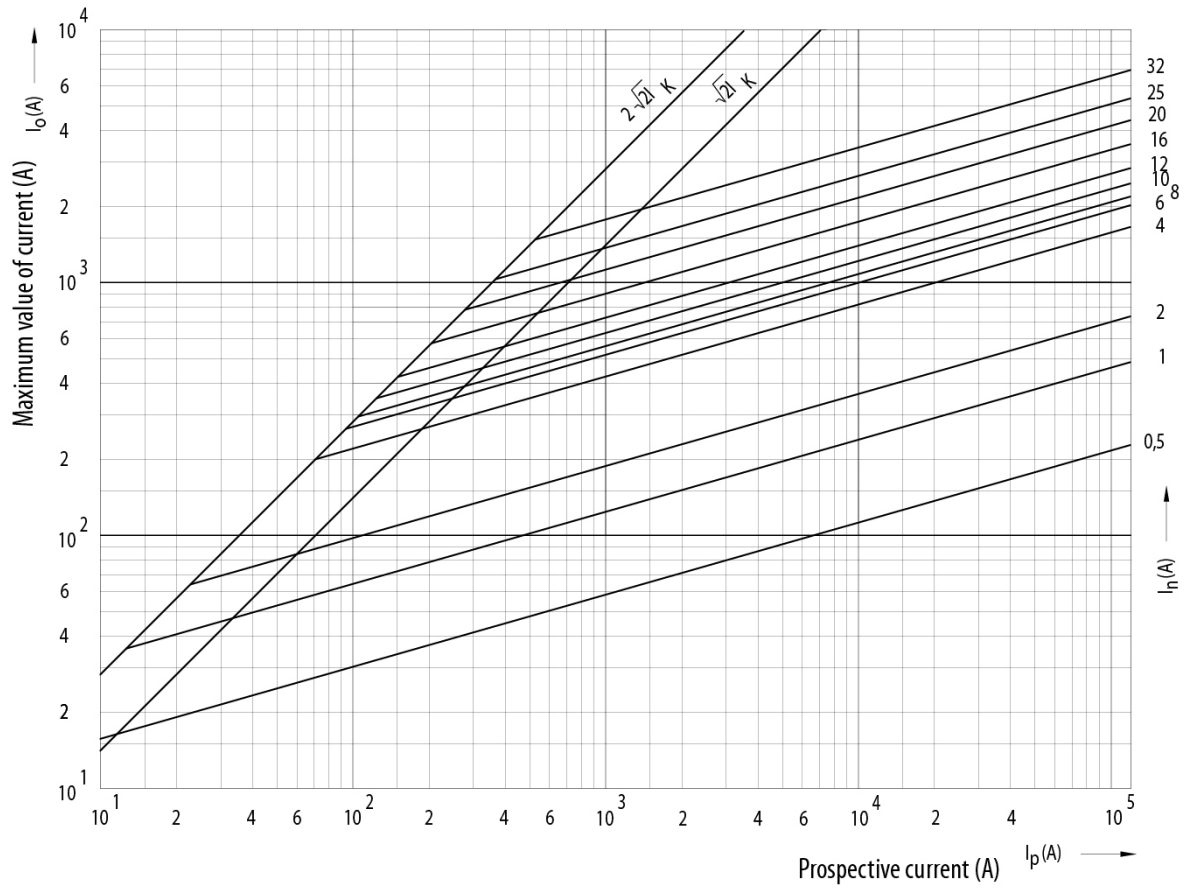


Melting energy characteristics

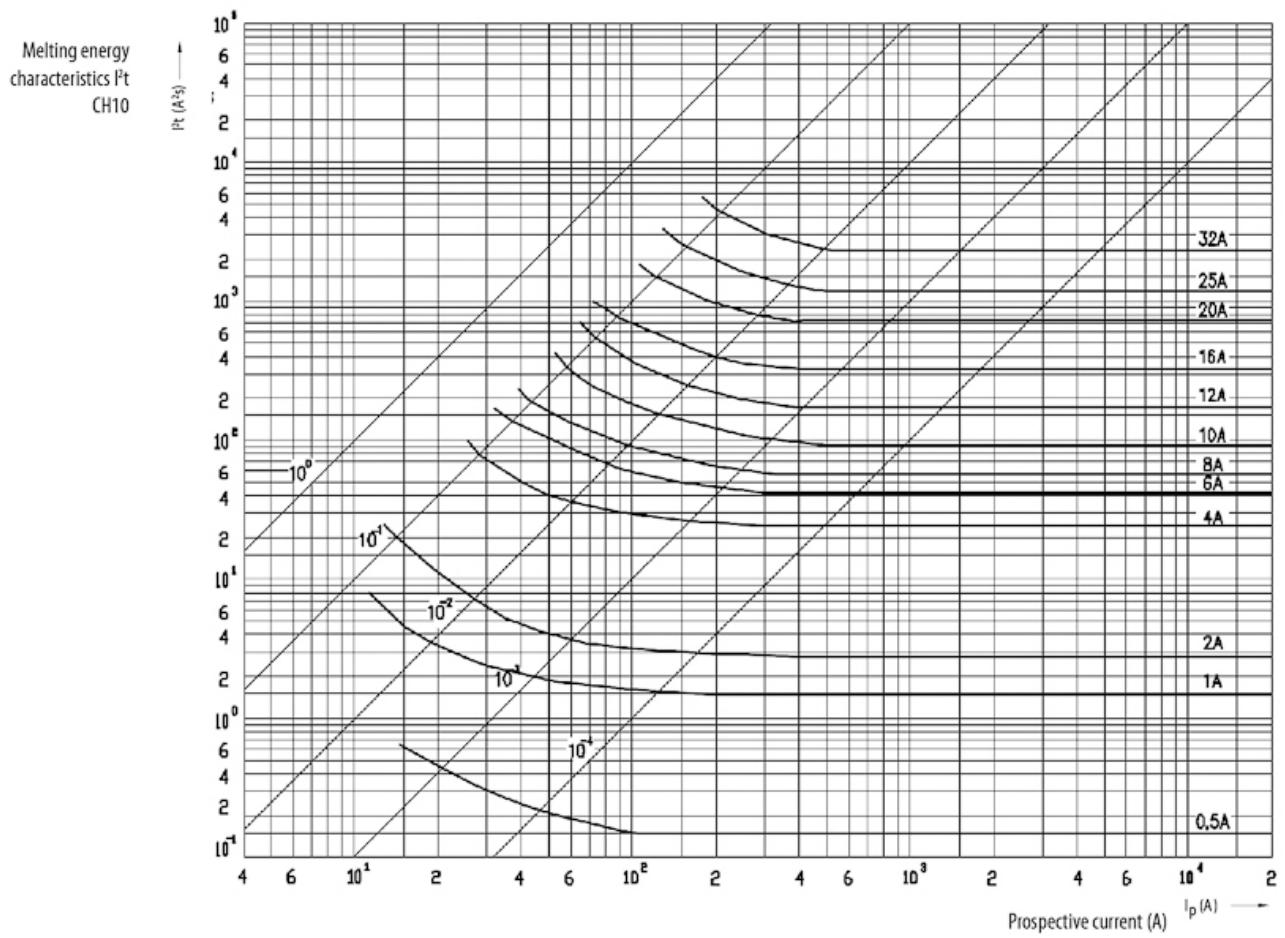


Time current characteristics

Time current
characteristics I/t, gG
CH10

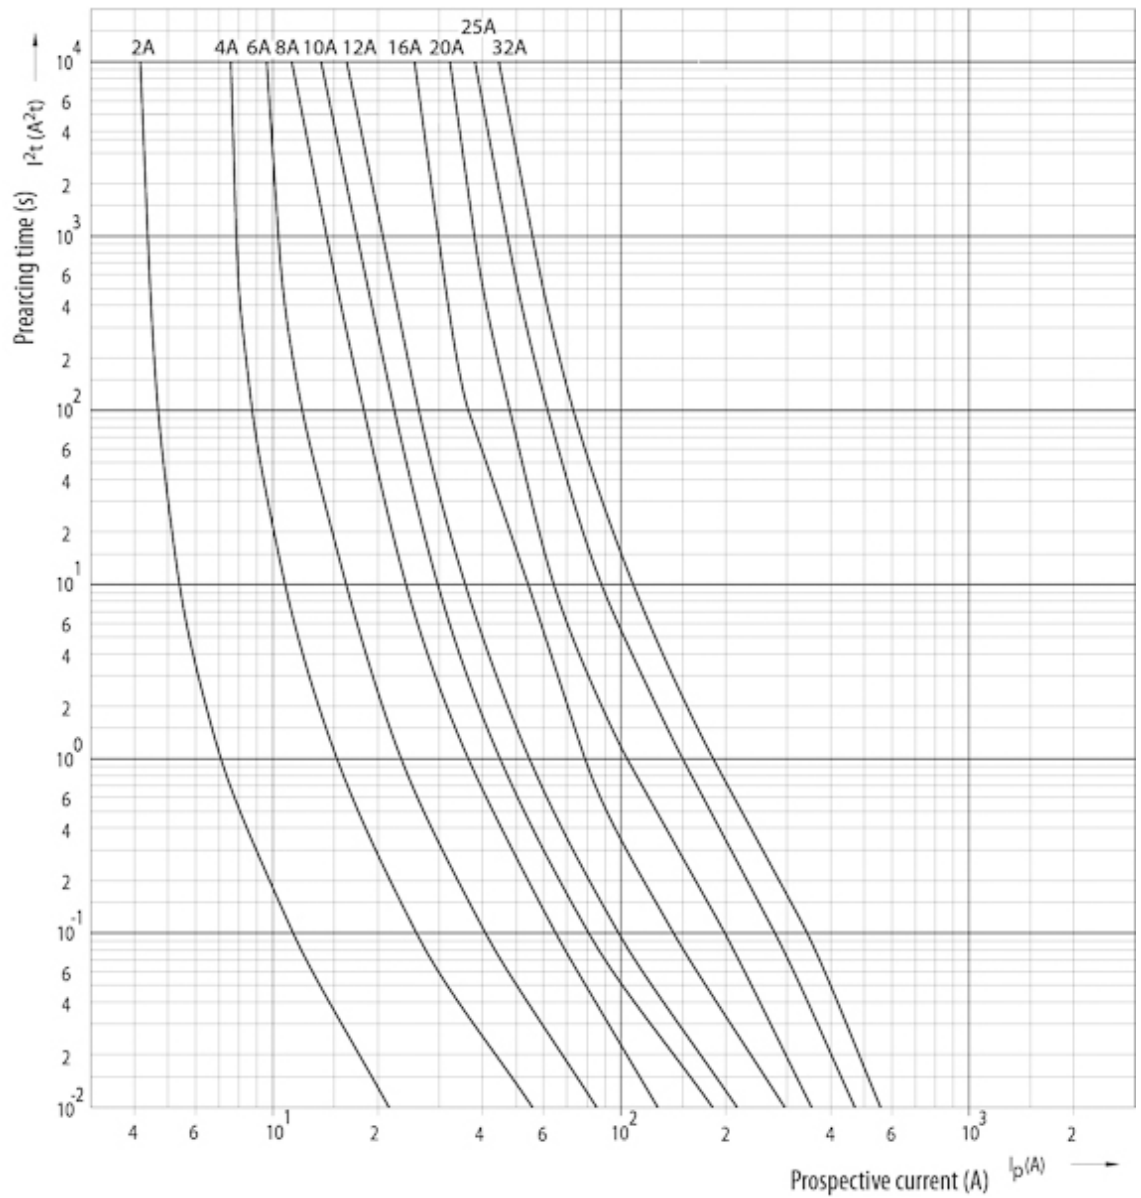

Dimension drawing

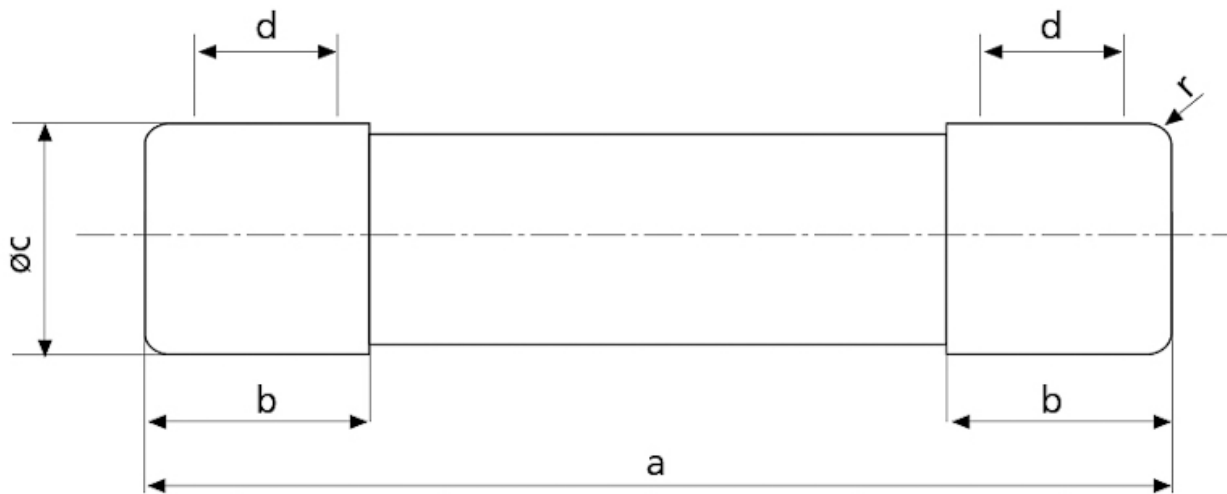

	a	$b_{\text{max.}}$	c	$d_{\text{min.}}$	r
8 x 32	$31,5 \pm 0,5$	6,7	$8,5 \pm 0,1$	4	$1 \pm 0,5$
10 x 38	$38,0 \pm 0,6$	10,5	$10,3 \pm 0,1$	6	$1,5 \pm 0,5$
14 x 51	$51,0 + 0,6 / -1$	13,8	$14,3 \pm 0,1$	7,5	± 1
22 x 58	$58,0 + 0,1$	16,2	$22,2 \pm 0,1$	11	± 1