

DI gG 2A/500V



Specifications

ETI Code	002311401
Description	DI gG 2A/500V
Weight	12
Level	Fuse links gG
Product group	D Low voltage Fuses
Characteristics	gL/gG (cable protection/equipment protection)
Rated AC voltage (V)	500
Rated current (A)	2
Type	D
Size	DI
Breaking capacity AC (kA)	50
Breaking capacity DC (kA)	8
Rated DC voltage (V)	250
Dimensions	E16
Indicator	visual top

Online product page

Other documentation



[EU declaration](#)


[Technical data catalogue](#)




ETIM international classification

Nominal rated current	2A
Nominal rated voltage	500V
Release characteristic	Time-lag
Colour code	Pink
Construction size	DI
Utilization category	gL/gG (cable protection/equipment protection)


Cut-off current characteristics

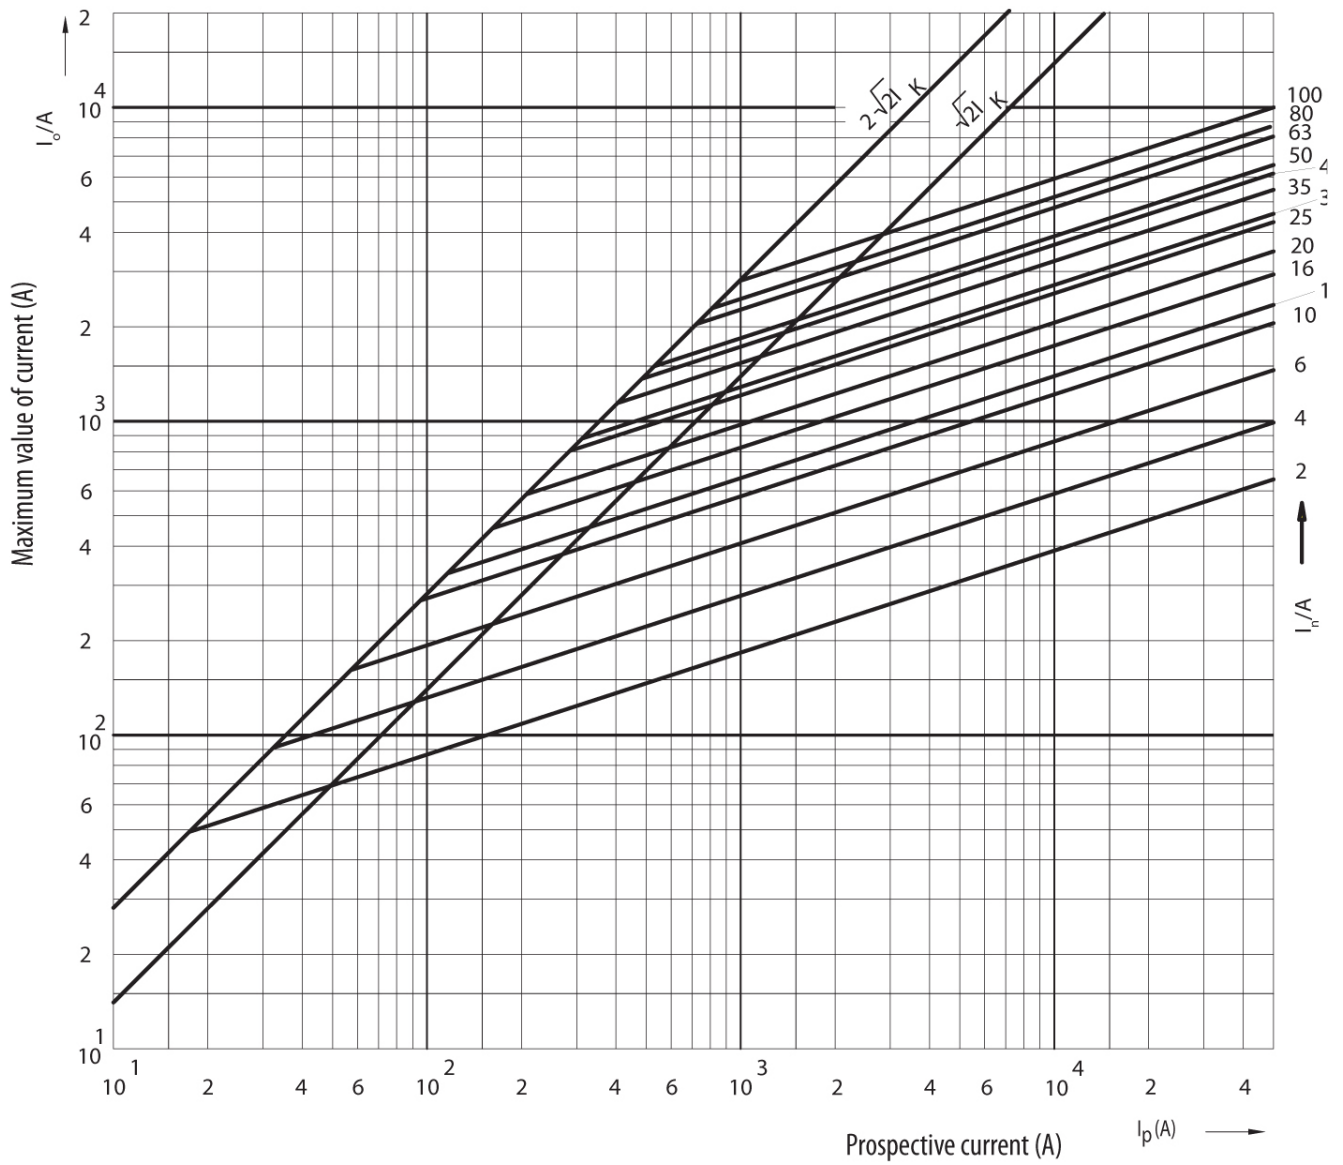


Melting energy characteristics

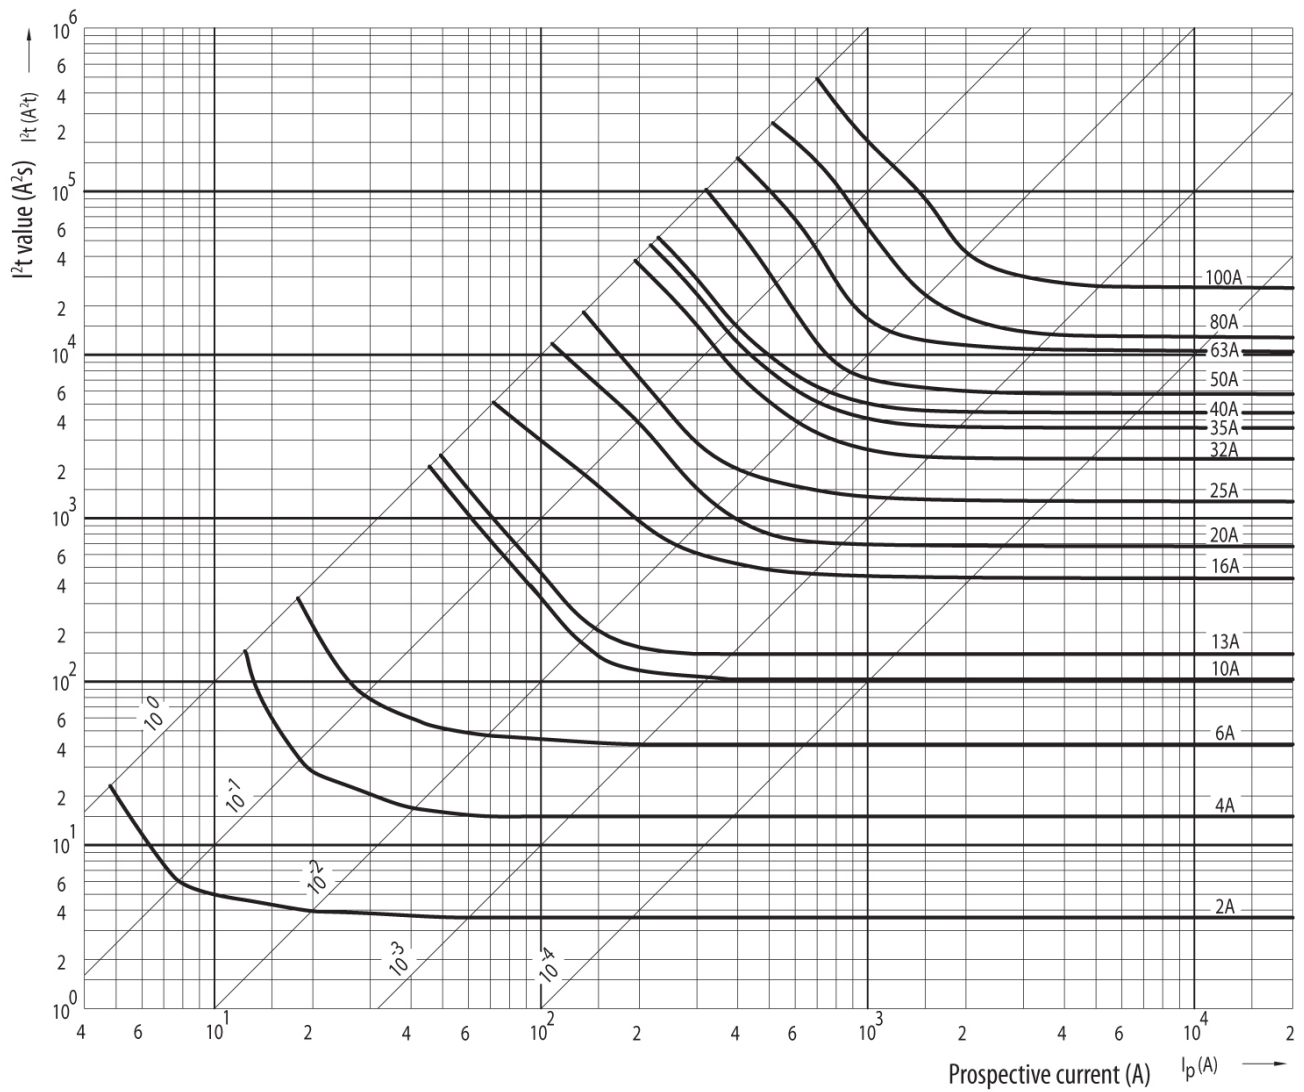

Time current characteristics

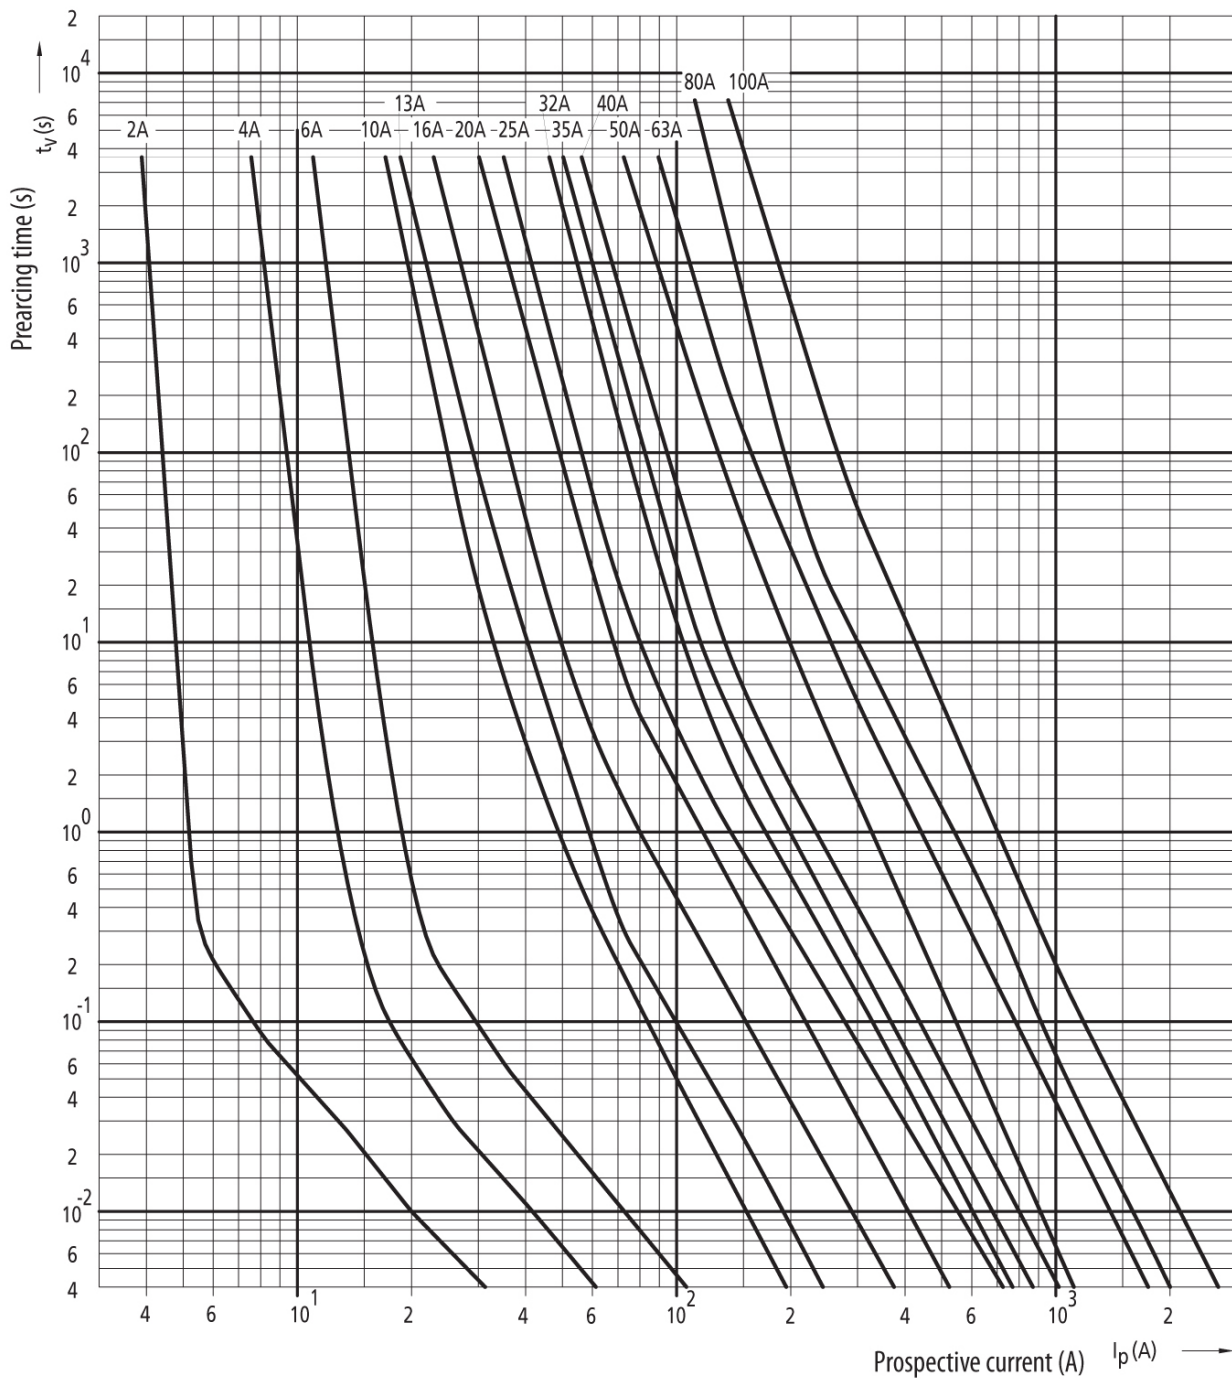

Dimension drawing

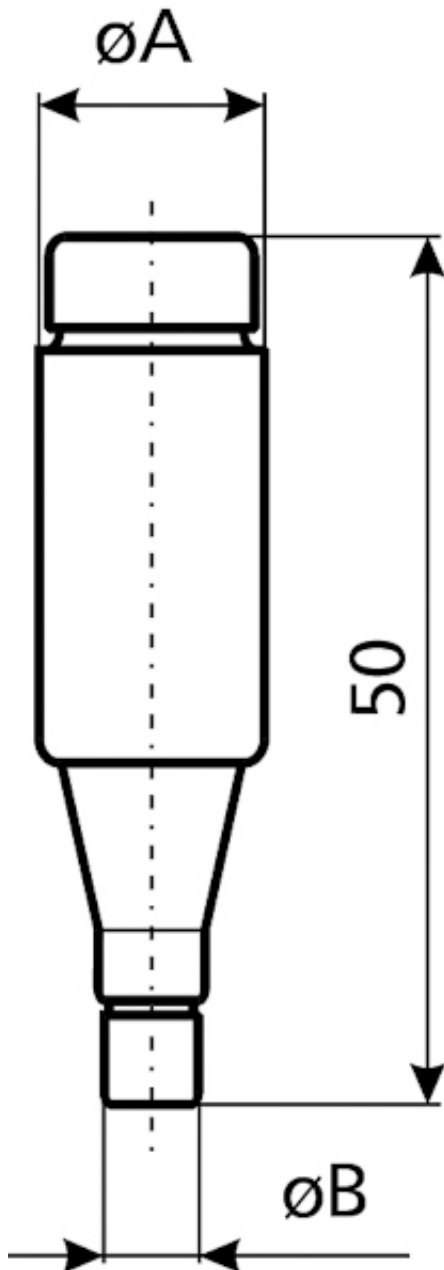

[A]	$\varnothing A$	$\varnothing B$
2	13,2	6
4	13,2	6
6	13,2	6
10	13,2	8
16	13,2	10
20	13,2	12
25	13,2	14