

Multi Slow Blow Fuse

RoHS

ELV



# MUSB-P2


For 7 circuits



## General Specification

Rated Voltage	DC32V
Breaking Capacity	1000A
Operation Temperature	-40°C~100°C
Standard	—
Country of Origin	Thailand
Plating	—
Standard Packaging	240

## Dimensions

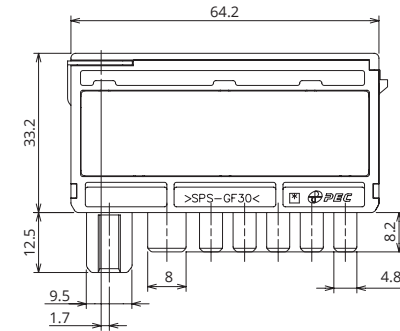

## Product Lineup

	Part Number	FUSE 1	FUSE 2	FUSE 3	FUSE 4	FUSE 5	FUSE 6	FUSE 7
1	3664	70A	60A	40A	30A	30A	40A	30A
2	3665	70A	40A	20A	40A	30A	40A	30A
3	3666	70A	40A	40A	30A	20A	30A	30A
4	3667	70A	40A	30A	40A	30A	40A	30A
5	3668	70A	60A	40A	30A	30A	20A	40A