

Multi Slow Blow Fuse

RoHS

ELV



MUSB-T


For 3 circuits



General Specification

Rated Voltage	DC32V
Breaking Capacity	1000A
Operation Temperature	-40°C~100°C
Standard	—
Country of Origin	Mexico
Plating	—
Standard Packaging	—

Dimensions

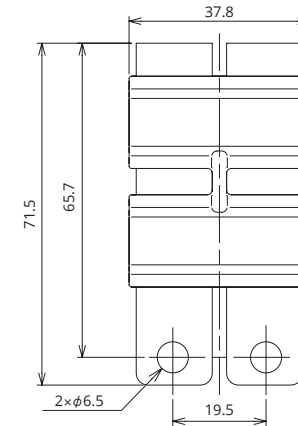

Product Lineup

	Part Number	FUSE 1	FUSE 2	FUSE 3
1	3729	125A	100A	325A
2	3739	125A	70A	375A
3	3738	125A	80A	375A
4	3737	125A	80A	300A
5	3736	125A	275A	200A